T1 Terminal

FASTON TYPE (Copper) quick disconnect tabs;
silver coating for better conductivity

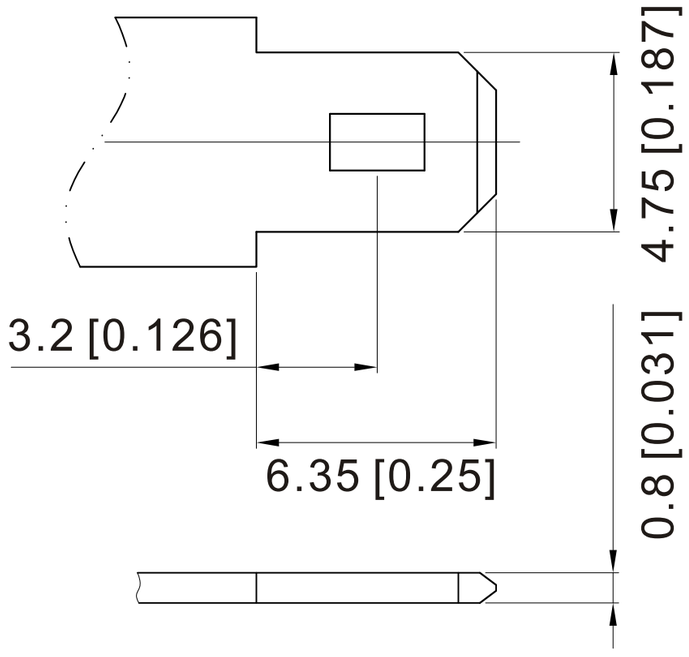

T2 Terminal

FASTON TYPE (Copper) quick disconnect tabs;
silver coating for better conductivity

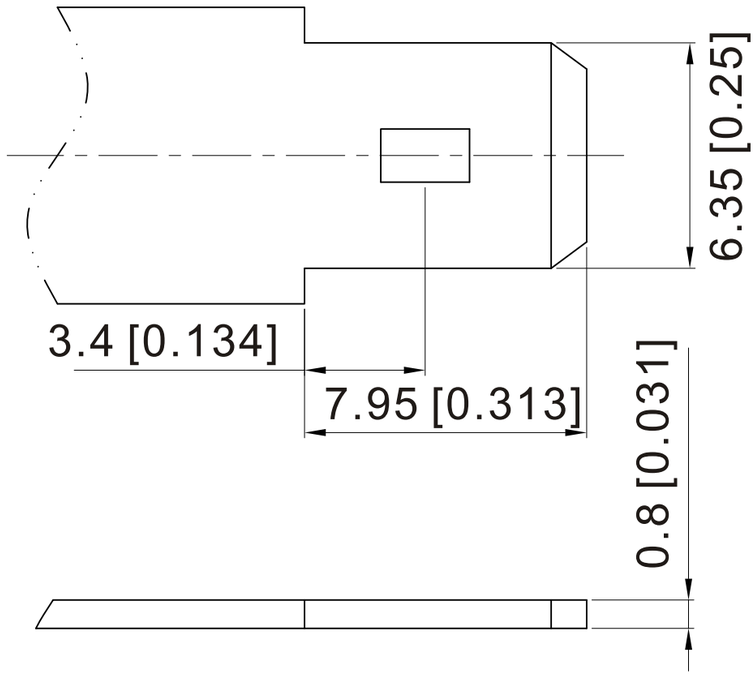

T3 Terminal

Brass Coated With Tin

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

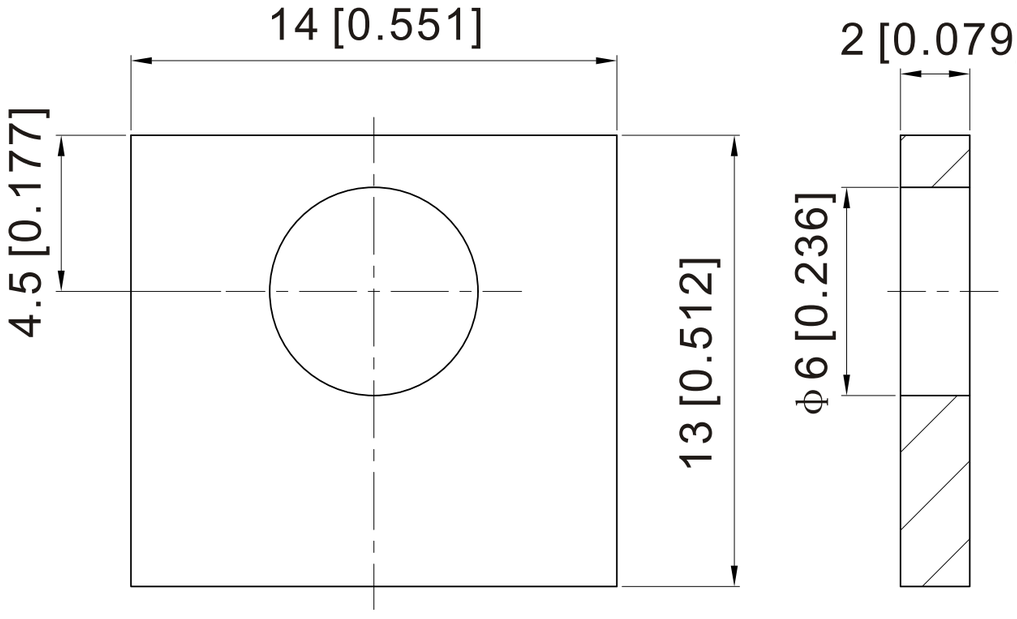

T4 Terminal

Brass Coated With Tin

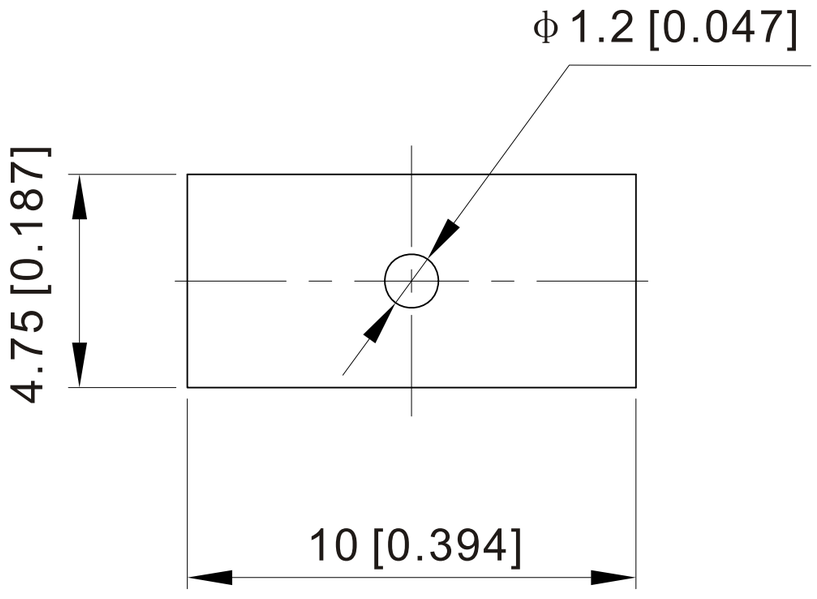

T5 Terminal

Lead

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

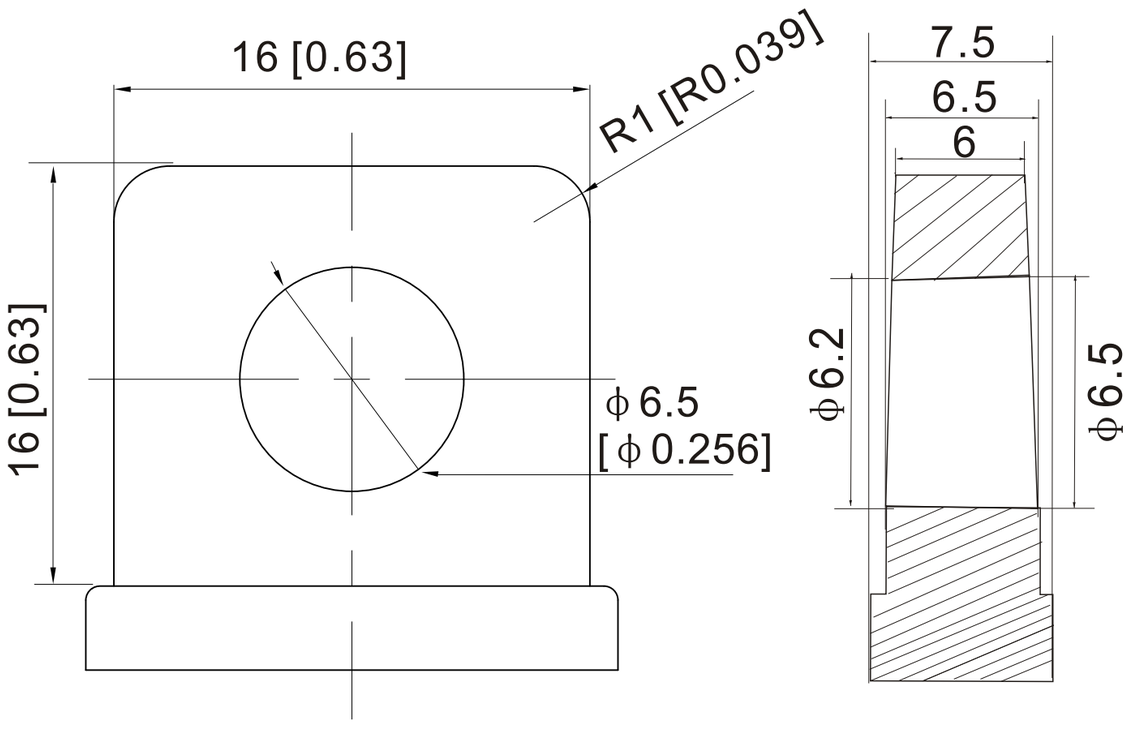

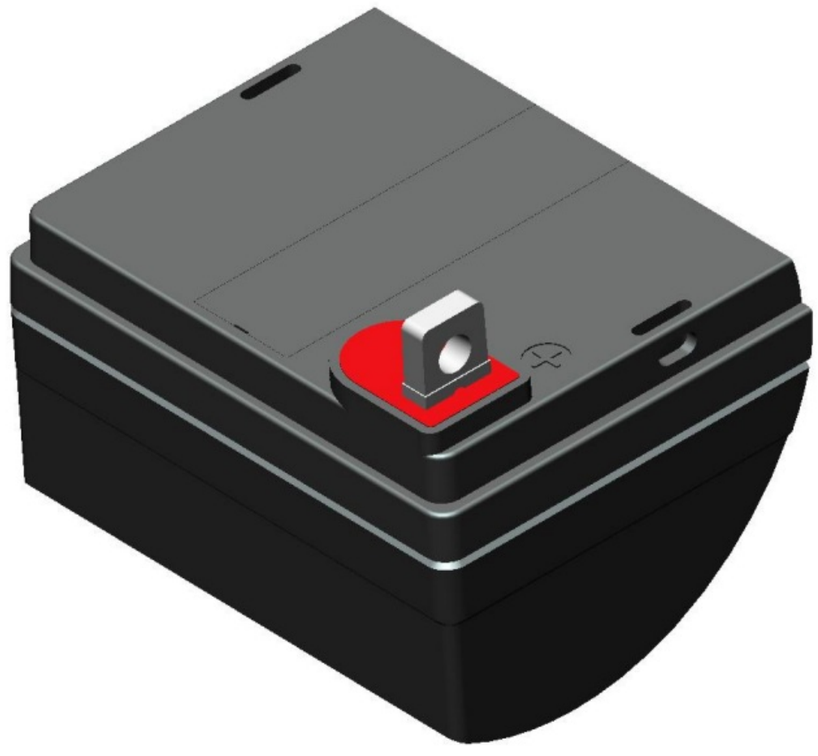

T6 Terminal

Brass Coated With Tin; Threaded Insert 6mm STUD

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

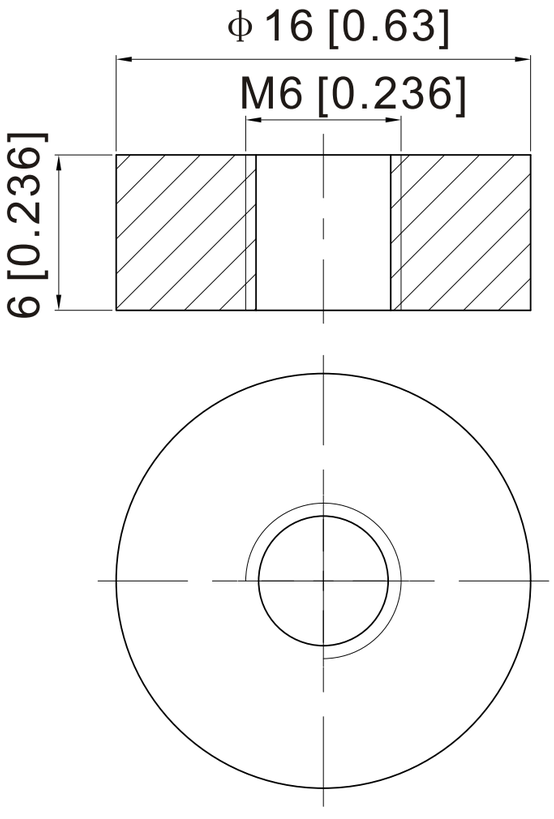

T7 Terminal

Brass Coated With Tin; Threaded Insert 6mm STUD

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

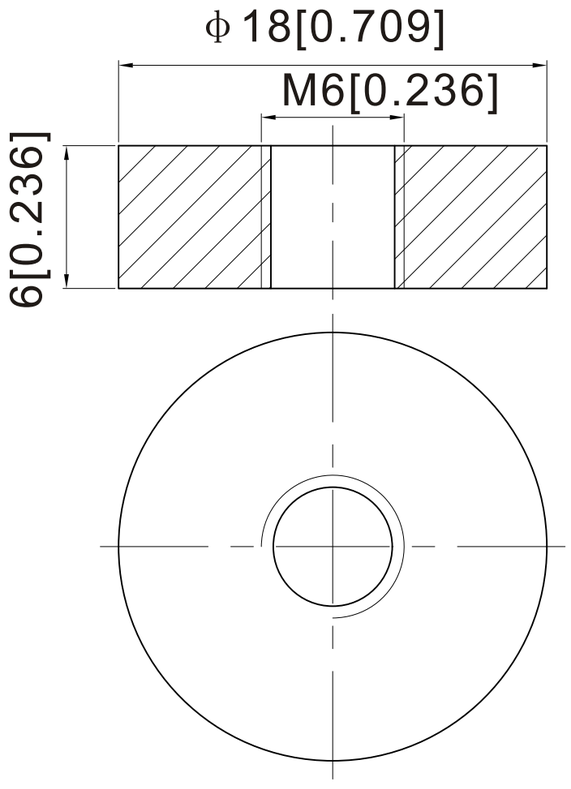

T9 Terminal

Lead

Torque: 11 ~ 14.7 N*m(97.28 ~ 130.0 in*lbs)

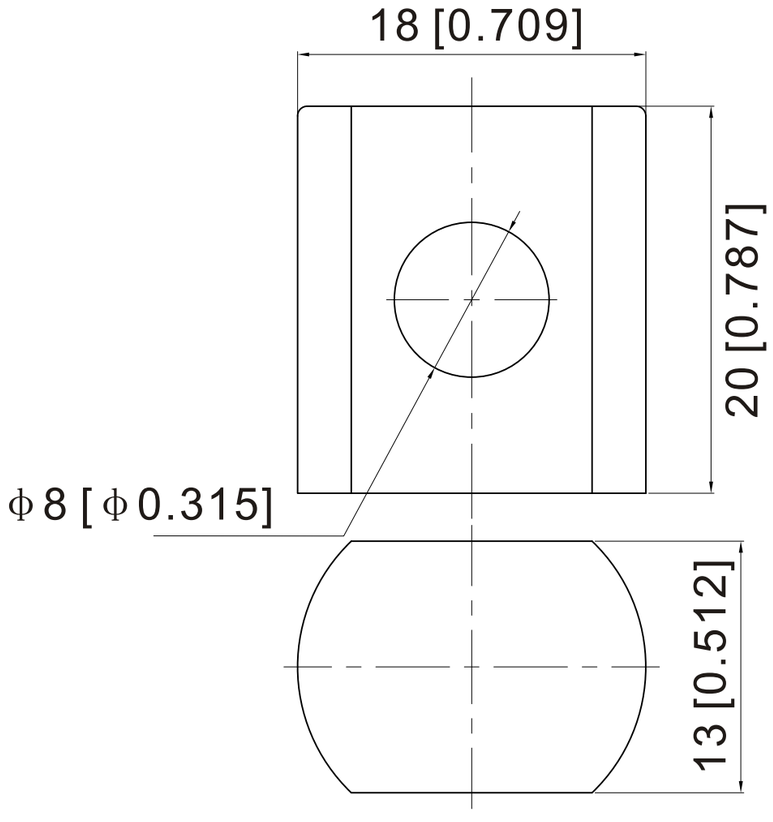

T10 Terminal

Lead

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

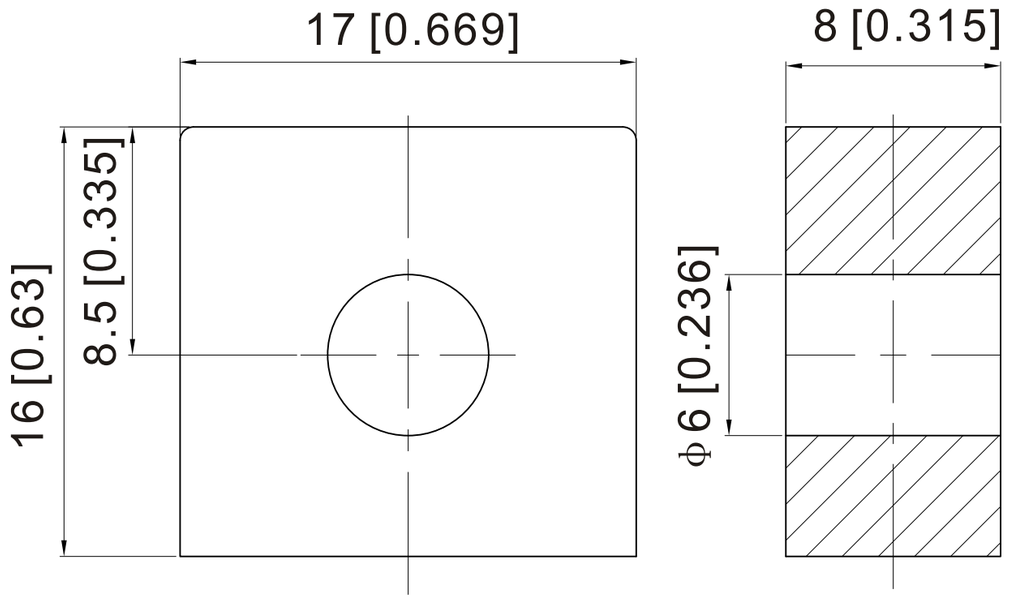

T11 Terminal

Brass Coated With Tin; Threaded Insert 8mm STUD

Torque: 11~14.7 N*m(97.28 ~ 130.0 in*lbs)

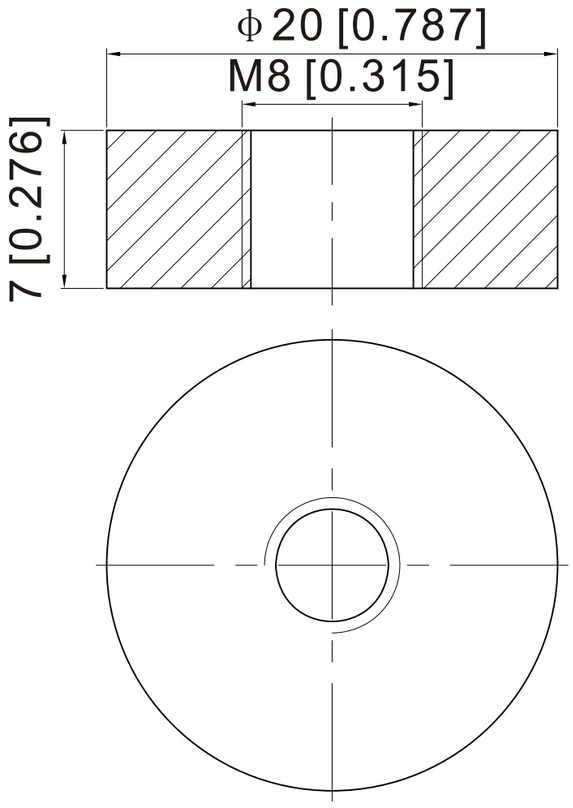

T12 Terminal

Brass Coated With Tin; Threaded Insert 5mm STUD

Torque: 2.0 ~ 3.0 N*m(17.69 ~ 26.53 in*lbs)

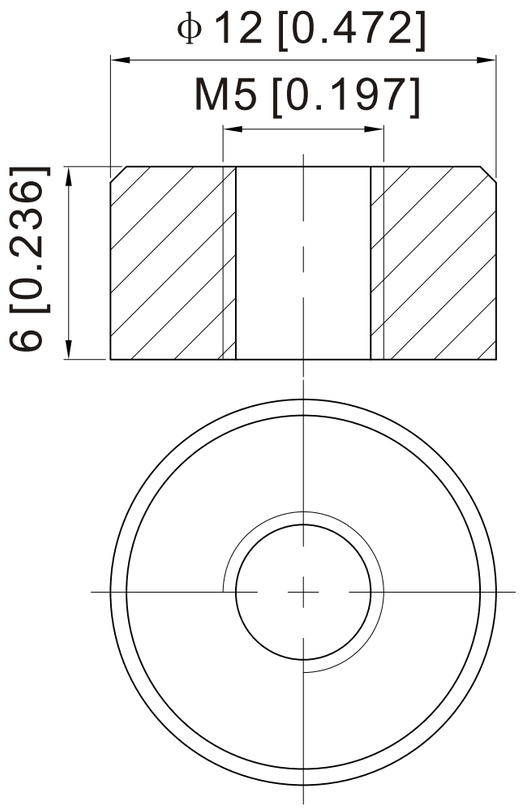

T13 Terminal

Brass Coated With Tin; Threaded Insert 6mm STUD

Torque: 3.9 ~ 5.4 N*m(34.39 ~ 47.75 in*lbs)

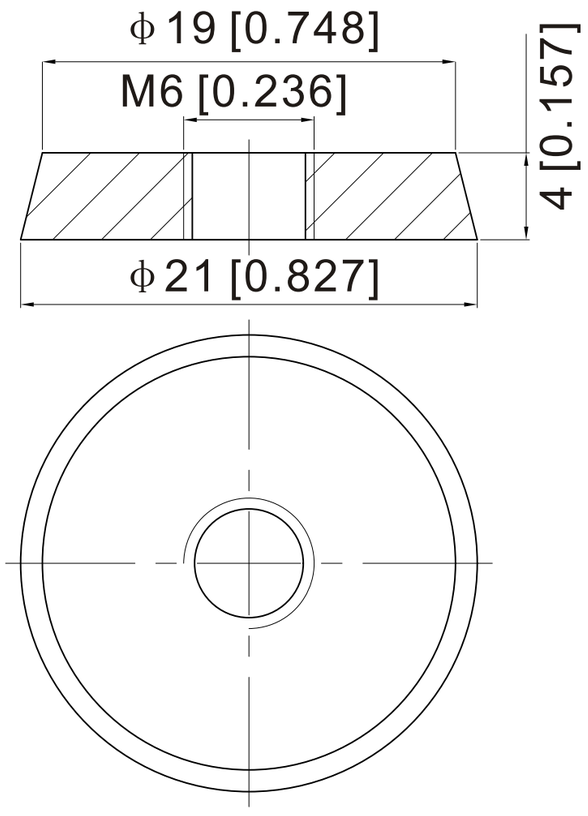

T14-1 Positive

Lead

Torque: 11 ~ 14.7 N*m(97.28 ~ 130.0 in*lbs)

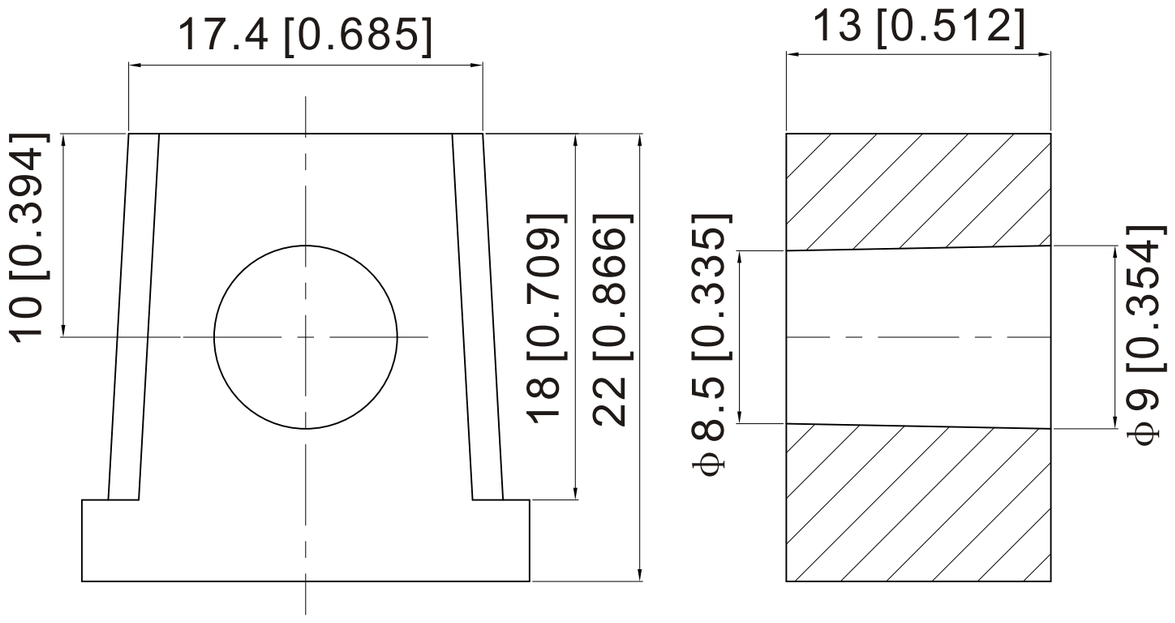

T14-2 Negative

Lead

Torque: 11 ~ 14.7 N*m(97.28 ~ 130.0 in*lbs)

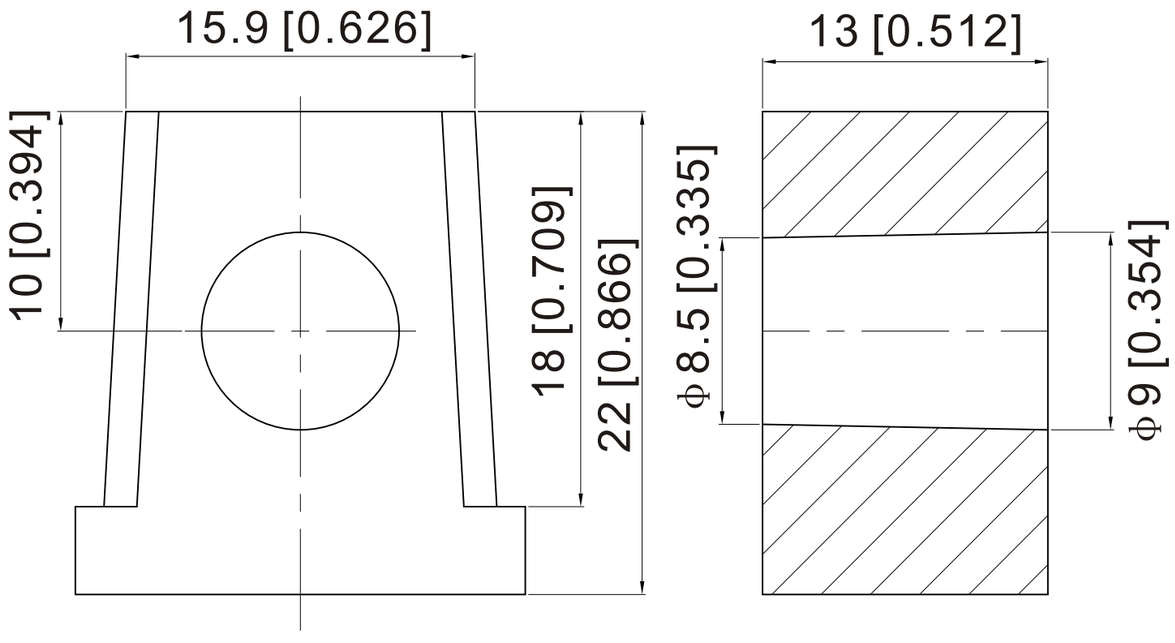

Spring Terminal

Spring Steel
Fully Collapsible

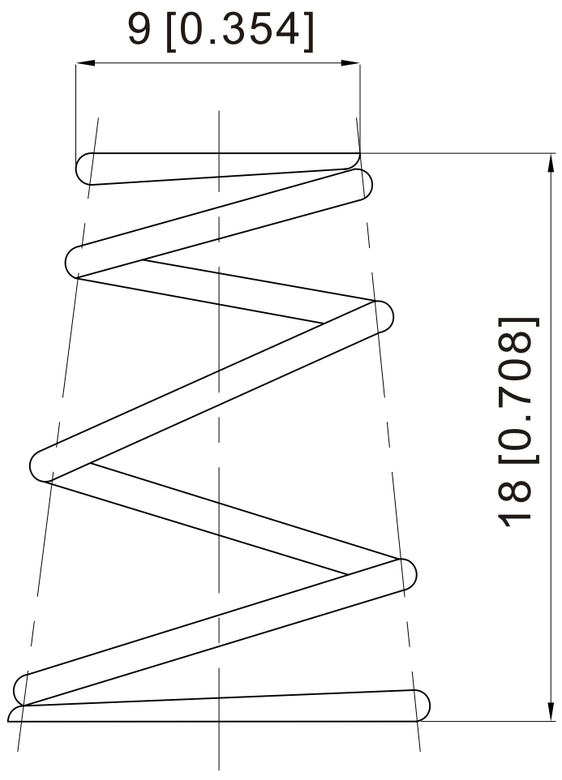

Connector
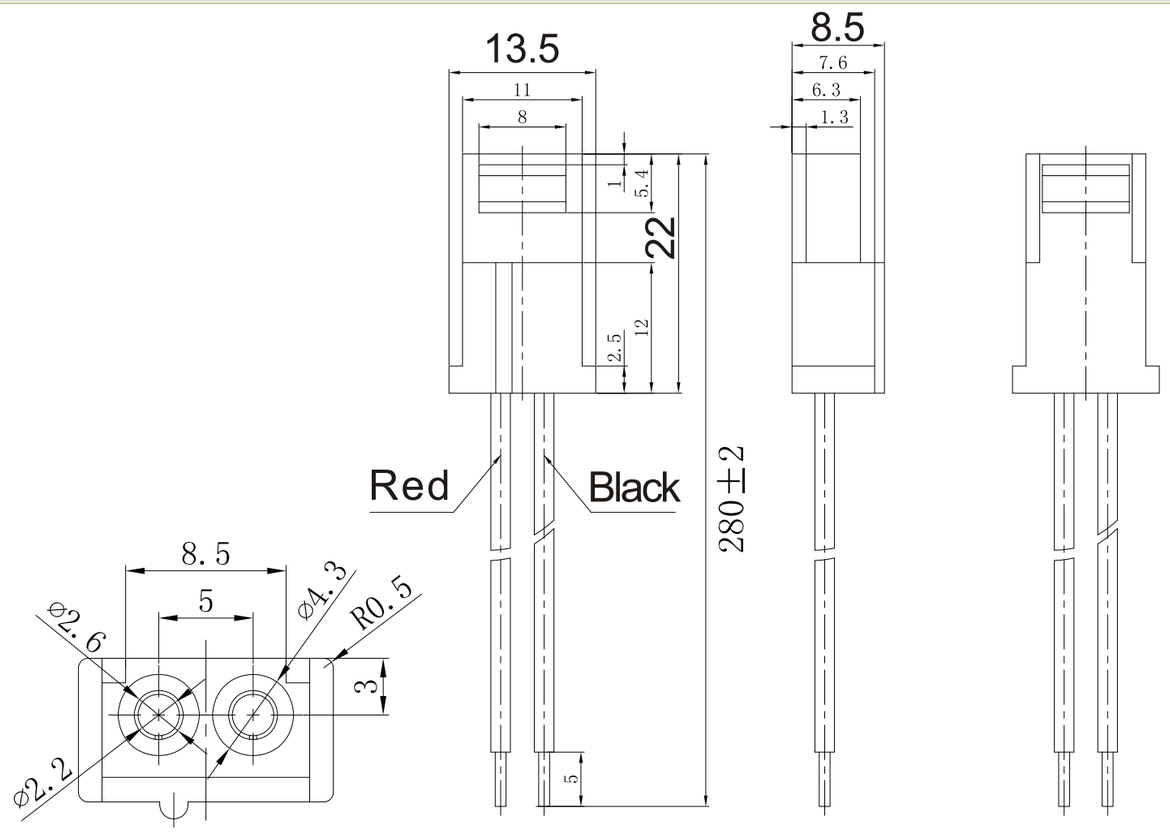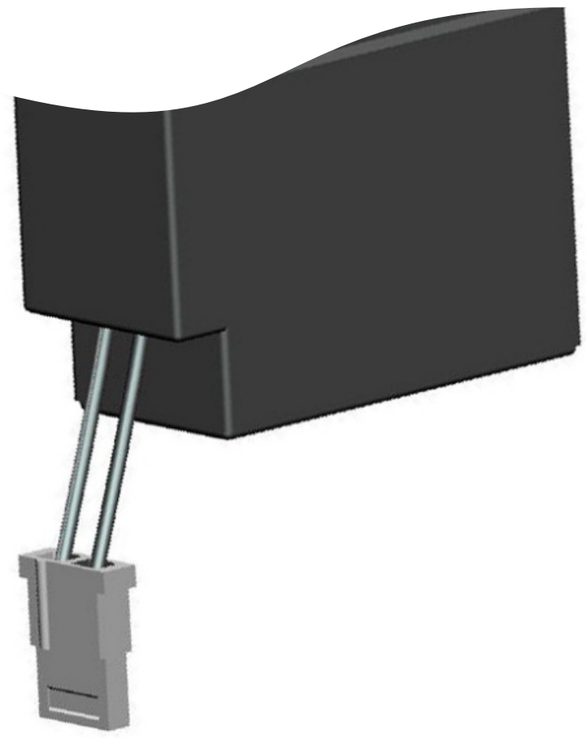
Toy Battery Connector
H-Connector